


4K H.265 Pro NVR 5000 Series



4K+H.265

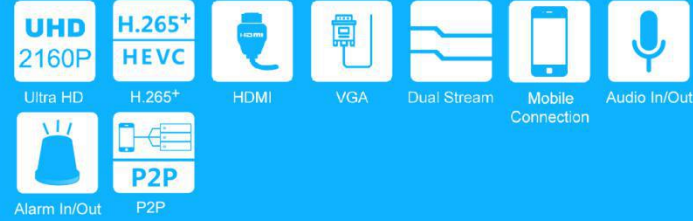

MS-N5016-UT/MS-N5032-UH


DATASHEET

KEY FEATURES

- ▶ **Powerful Decoding Capacity** (Maximum supporting 8*1080P or 16*720P for MS-N5016-UT and 16*1080P or 32*720P for MS-N5032-UH.)
- ▶ **HDMI & VGA** (Providing both HDMI and VGA ports for users to choose according to their monitor types.)
- ▶ **2*3.5" HDD** (2 SATA of 3.5" HDD, providing 10TB capacity for each HDD, up to 20TB total hard disk storage.)

H.265+H.264

Smartly figure out and switch between H.264 and H.265 automatically. It will extend the days to save recording file with H.265 than with other compressions.

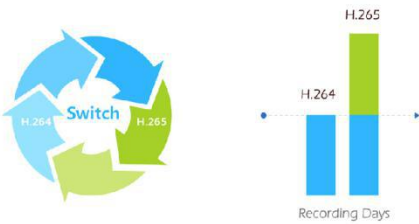

4K Video Viewing Experience

Milesight 4K H.265 Pro NVR 5000 Series supports up to 4K definition (3840*2160, effectively four times that of Full HD) live viewing, playback and recording, providing users with ultra-high-definition video viewing experience.



Powerful Decoding Capacity

Maximum supporting 8*1080P or 16*720P for MS-N5016-UT and 16*1080P or 32*720P for MS-N5032-UH.



Remote Access

Milesight 4K H.265 Pro NVR 5000 Series can be easily accessed and managed remotely via Milesight CMS and mobile APP.






Model		MS-N5016-UT	MS-N5032-UH
Video/Audio Input	Network Video Input	16-CH	32-CH
	Bandwidth	Incoming 160Mbps Outgoing 160Mbps	256Mbps 256Mbps
Video/Audio Output	HDMI Output	1-CH, Resolution: 3840x2160/60Hz (only for MS-N5032-UH), 3840x2160/30Hz, 1920x1080/60Hz, 1920x1080/50Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz HDMI Supports Audio Output	
	VGA Output	1-CH, Resolution: 1920x1080/60Hz, 1920x1080/50Hz, 1280x1024/60Hz, 1280x720/60Hz, 1024x768/60Hz	
	Dual Stream	Support	
	Recording Resolution	8MP/6MP/5MP/4MP/3MP/1080P/UXGA/720P/D1/VGA/CIF/QCIF	12MP/8MP/6MP/5MP/4MP/3MP/1080P/UXGA/720P/D1/VGA/CIF/QCIF
Synchronous Playback	2*(30fps @8MP), 2*(30fps @6MP), 3*(20fps @5MP), 4*(20fps @4MP), 5*(30fps @3MP), 8*(30fps @1080P), 16*(30fps @720P)	4*(30fps @8MP), 5*(30fps @6MP), 6*(20fps @5MP), 8*(20fps @4MP), 10*(30fps@3MP), 16*(30fps@1080P), 32*(30fps@720P)	
Video/Audio Compression	Video Compression	H.265 ⁺ /H.265(HEVC)/H.264 ⁺ /H.264	
	Audio Compression	G.711/AAC	
	Sample Rate	8KHz/16KHz	
	Synchronous Recording	16*5MP	32*5MP
Storage	SATA	2*SATA HDD(3.5")	
	Capacity	Up to 10TB capacity for each HDD	
Recording Management	Recording	Manual Recording, Timing Recording, Motion Detection Recording, Alarm Recording, Motion Detection or Alarm Recording, Motion Detection and Alarm Recording	Manual Recording, Timing Recording, Motion Detection Recording
	Snapshot	Manual Snapshot	
	Playback	Video Playback, Image Playback	
Backup	Backup	Video Backup, Image Backup	
Network	Protocol	IPv4/IPv6, TCP, UDP, RTP, RTSP, RTCP, HTTP, HTTPS, DNS, DDNS, DHCP, NTP, SNTP, SMTP, SNMP, UPnP, NFS	
External Interface	Network Interface	1*RJ45 100M/1000M	
	USB Interface	1*USB 3.0; 2*USB 2.0	
	Audio Input/Output	— /1*RCA	1*RCA/1*RCA
	Alarm Input/Output	4-CH/1-CH	—
General	Compatibility	ONVIF	
	Video Analysis	Region Entrance, Region Exiting, Advanced Motion Detection, Tamper Detection, Line Crossing, Loitering, Human Detection, People Counting	
	Keyboard Control	Milesight Keyboard (MS-K02)	
	Power Supply	DC 12V 50Hz~60Hz	
	Consumption	≤10W(Without HDD)	≤15W(Without HDD)
	Working Conditions	Temperature: -10℃~+55℃ Humidity: 10%~90%	
	Dimensions	Rack Mountable Chassis (1.0U Standard) 440mm(W)X251mm(D)X44.4mm(H)	
	Weight	2.6Kg	
	Warranty	3/5 Years	

4K H.265 Pro NVR 5000 Series




Interfaces

MS-N5016-UT

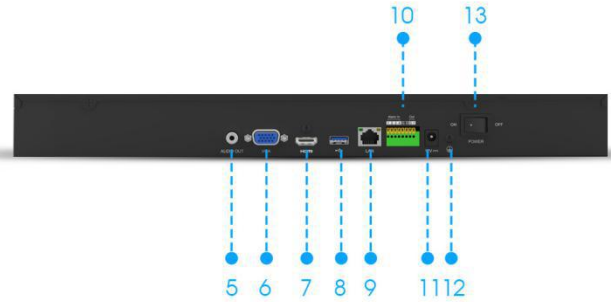


- 1. Run Indicator 2. HDD Indicator 3. Power Indicator 4. USB 5. Audio Out 6. VGA 7. HDMI 8. USB
- 9. Ethernet Port 10. Alarm In/Out 11. Power 12. GND 13. Power Button

MS-N5032-UH

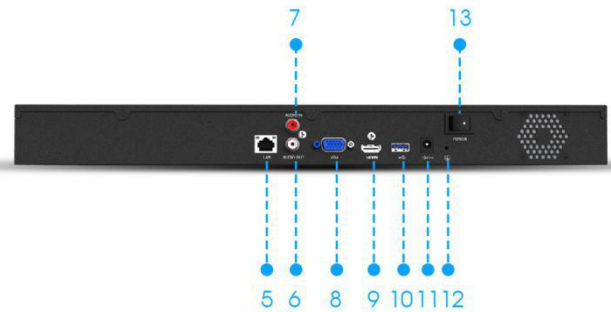

- 1. Run Indicator 2. HDD Indicator 3. Power Indicator 4. USB 5. LAN 6. Audio Out 7. Audio In 8. VGA
- 9. HDMI 10. USB 11. Power 12. GND 13. Power Button

Structure Diagrams

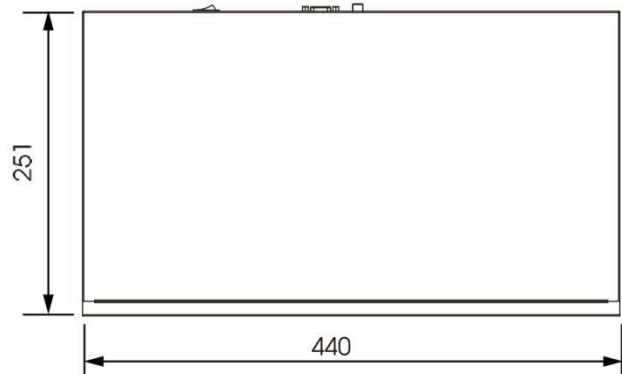

Units: mm

Naming Convention



Mlesight Technology Co.,Ltd. | www.mlesight.com

Contact Us: sales@mlesight.com support@mlesight.com



Add: 7509 N.W. 36th Street, Miami,
Florida 33166, USA
Tel: +1-800-561-0485

Add: 9F/901, Star Valley B/D Digital-ro
9gil 99, Geumcheon-gu, Seoul, Korea
Tel: +82-2-839-3335

Add: No.23 Wanghai Road,
2nd Software Park, Xiamen, China
Tel: +86-592-5922772